

## Tekiò Vertical

Anthony Dickens. 2017  
Pendant lamps



P1



A

P2



B

P3




C

P4



D



In its multiple sizes, Tekiò Vertical illuminates every space with intimacy. It gathers, inspires and enlightens. It sculpturally resolves spaces of varying heights by bathing them in uniform light. On its own or in repetition, its luminous intensity can range from a whisper to an exclamation.

### General description:

Washi Japanese paper shade.

Metal structure.

Structure length:

(A) 67 cm / 26.4"

(B) 120 cm / 47.2"

(C) 173 cm / 68.1"

(D) 226 cm / 89"

White grey metallic circular ceiling plate with power supply incorporated.

Electric cable length: 5 m / 196.8"

### Approximate weight (unpacked):

(A) Tekiò Vertical P1: 3 Kg / 6.6 lb

(B) Tekiò Vertical P2: 4,5 Kg / 9.9 lb

(C) Tekiò Vertical P3: 6 Kg / 13.2 lb

(D) Tekiò Vertical P4: 7,5 Kg / 16.5 lb

## Tekiò Vertical

Anthony Dickens. 2017  
Pendant lamps

### Technical information:

Light source included (dimmable)

#### (A) LED module

Rated input wattage: 43 W (European version) / 34 W (American version)  
Luminous flux: 1.251 lm (European version) / 964 lm (American version)

#### (B) LED module

Rated input wattage: 73 W (European version) / 56 W (American version)  
Luminous flux: 2.190 lm (European version) / 1.687 lm (American version)

#### (C) LED module

Rated input wattage: 100 W (European version) / 73 W (American version)  
Luminous flux: 3.128 lm (European version) / 2.315 lm (American version)

#### (D) LED module

Rated input wattage: 120 W (European version) / 87 W (American version)  
Luminous flux: 4.067 lm (European version) / 3.051 lm (American version)

#### (A, B, C, D)

Operating voltage: 24VDC

CCT: 2.200K - 2.700K

CRI: 90

Lifetime: 40.000 h

#### Built-in LED

European version: suitable for dimming 1-10V / DALI. Not included external dimmer switch 1-10V / DALI.

American version: suitable for dimming 0-10V. Not included external dimmer switch 0-10V.


Dim to Warm control 2200K- 2700K.

Suitable only for indoor use.

Always use this light source.

Input voltage: 100 ~ 277 Vac.

(50 Hz / 60 Hz). According to destination.

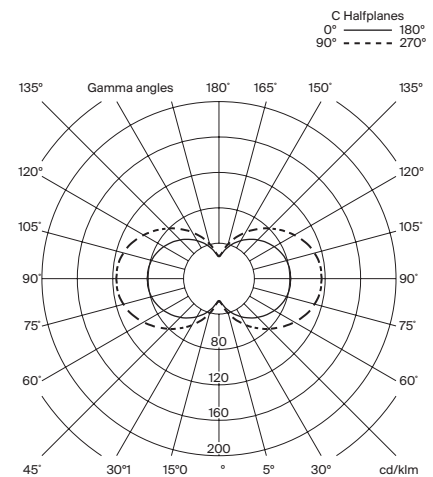

### Regulations:

European version

UNE-EN 60598

UNE-EN 55015

UNE-EN 60529

American version

Dry location only

UL-1598

UL-8750

E-336377

### Maintenance:


Clean with a smooth cloth. Do not use ammonia, solvents or abrasive cleaning products.

### Others:

The lamp is delivered in different packages.

The assembly instructions are delivered with the product.

**Models:** Tekiò Vertical

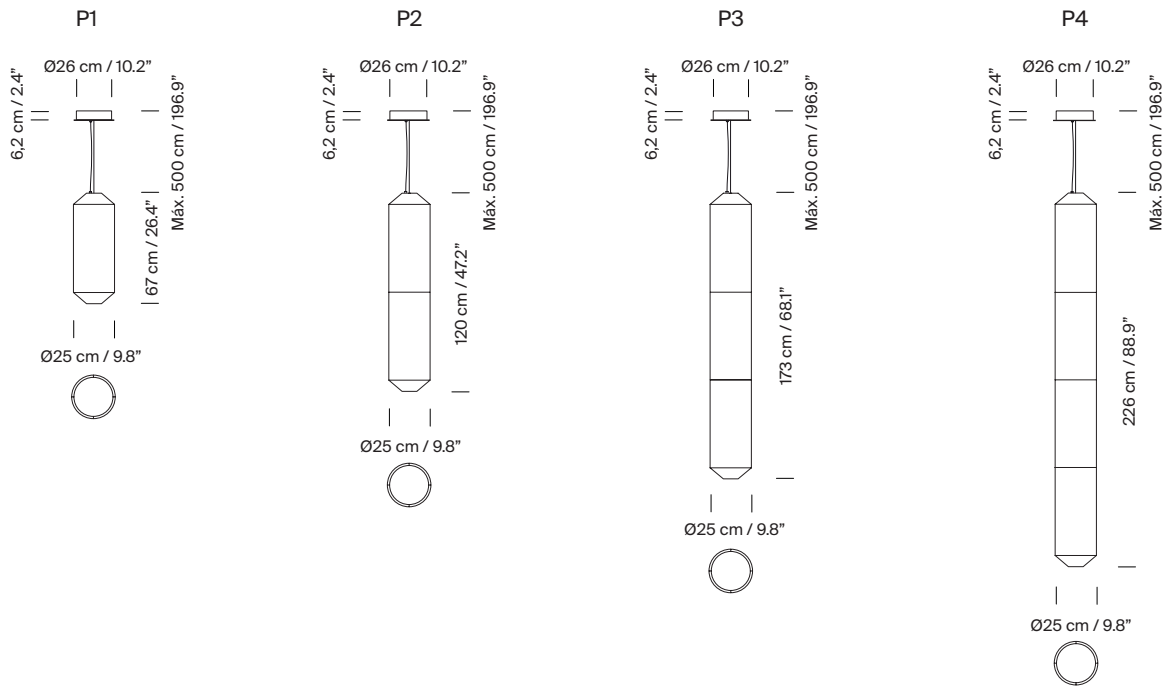

**Collection:**  
Pendant lamps



Tekiò Vertical



Tekiò Horizontal



Tekiò Circular